


1、Mechanical Outline(Unspecified Tolerances is:  $\pm 0.3\text{mm}$ ) Color: White

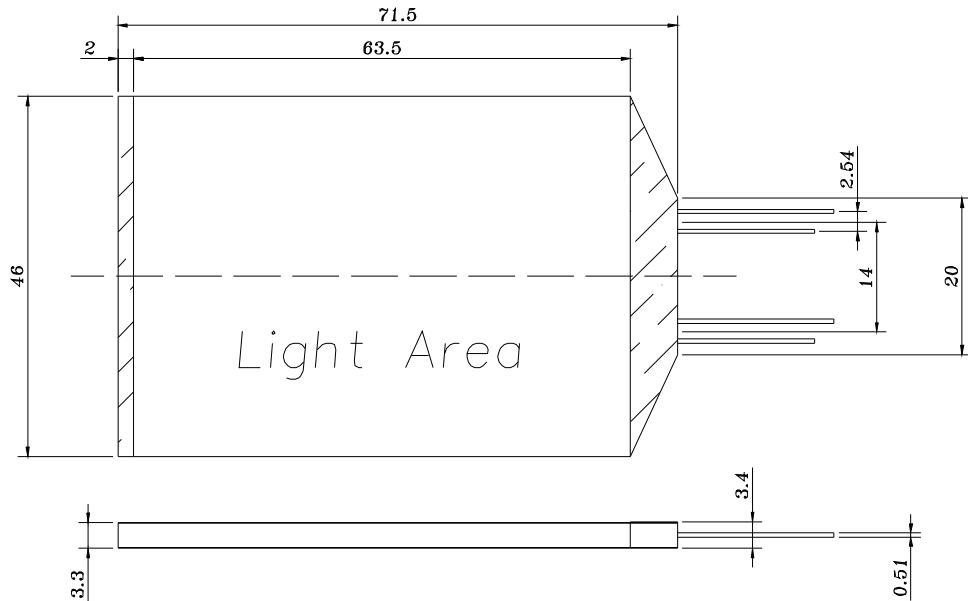

2、Lamps: 1 x 2 = 2

### 3、Storage & Soldering Conditions:

- I Store with care. Storing the units in bad condition will cause the reflector sheet and decrease it's adhesive power. Storage the products under the condition: temperature ( $25^\circ\text{C} \pm 10^\circ\text{C}$ ) and humidity ( $65^\circ\text{CRH} \pm 20^\circ\text{CRH}$ ) our recommendation.
- I The soldering Temperature is  $260 \pm 5^\circ\text{C}$  and Soldering Time should be less than 3 sec, and soldering iron power should be less than 30W.
- I The soldering point should be farther than 1.6mm from body.

### 4、ABSOLUTE MAXIMUM RATINGS (Single Lamp)

(Unless specified, The Ambient temperature  $T_a=25^\circ\text{C}$ )

Item	Symbol	Condition	Rating	Unit
Absolute maximum forward current	Ifm		30	mA
Peak forward current	Ifp	1 msec Plus 10% Duty Cycle	50	mA
Reverse Voltage	Vr		5	V
Power dissipation	Pd		100	mW
Operating Temperature Range	Topr		-20~+70	°C
Storage Temperature Range	Tstg		-20~+75	°C

5、ELECTRICAL-OPTICAL CHARACTERISTICS (Single Lamp)  
 (Unless specified, The Ambient temperature  $T_a=25^{\circ}\text{C}$ )

Item	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward Current	If	15	20	25	mA	$V_f=3.3\text{V}$
Forward Voltage	$V_f$	3.0	3.3	3.6	V	$If=20\text{mA}$
Reverse Current	$I_r$			10	$\mu\text{A}$	$V_r=5\text{V}$
Luminance (Without Glass)	$L_v$	56	66	75	$\text{cd}/\text{m}^2$	$If=20\text{mA}$

## 6、Chromaticity Coordinates


Item	Symbol	Min.	Typ.	Max.	Unit	Condition
Typical x	x		0.27			$If=20\text{mA}$
Typical y	y		0.27			$If=20\text{mA}$

## 7、STATIC ELECTRICITY AND SURGE

- | Static electricity and surge will damage the LEDs. It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.
- | All devices, equipment and machinery must be properly grounded.

## 8、LED Electrical Characteristics

Forward Current VS. Ambient Temperature

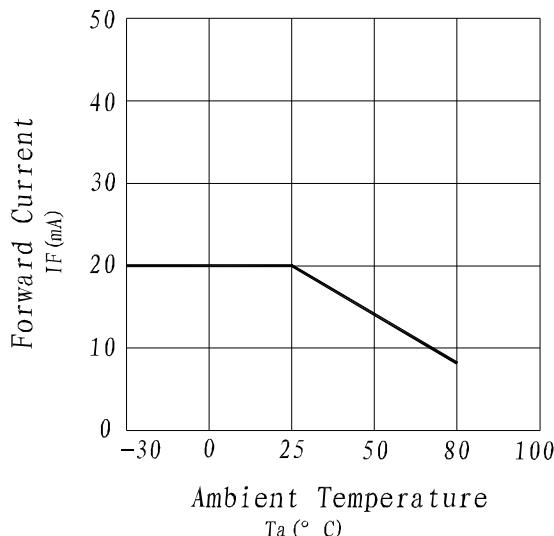

Relative Intensity VS. Ambient Temperature

