



PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM1			1F	1A	2F	2A	3F	3A	4F	4A	5F	5A	6F	6A	COM1			
COM2			1G	1B	2G	2B	3G	3B	4G	4B	5G	5B	6G	6B				
COM3			1E	1C	2E	2C	3E	3C	4E	4C	5E	5C	6E	6C		COM3		
COM4	COM4		1D	P1	2D	P2	3D	P3	4D	P4	5D		6D	P6				P5
																		BAT

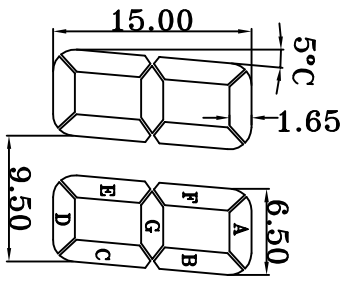

- NOTES:
- 1.TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.20
 - 2.VIEWING ANGLE: 12:00 O'CLOCK
 - 3.DISPLAY MODE: POSITIVE/REFLECTIVE/TN TYPE
 - 4.DRIVING VOLTAGE: V=3.0v, DUTY: 1/4, BIAS: 1/3
 - 5.OPERATING TEMP.: -5°C TO 55°C
 - 6.STORAGE TEMP.: -10°C TO 60°C
 - 7.CONNECTOR: PIN TYPE

NO.	DATE	MODIFY	CONTENTS	NAME	COMPANY
6					Longtech Optics Co., Ltd
5					
4					
3					
2					
1					

DESIGN BY:	M.T.W.U	SAMPLE:	NO	YES
CHECKED BY:		CUSTOMER TITLE:		
DATE:	DEC 19, 2006	APP BY:	PP-1535P	UNIT:
SHEET:	1 OF 1	COMPOSE TYPE:	MONO	ALONG
X-STEP:				
Y-STEP:				