

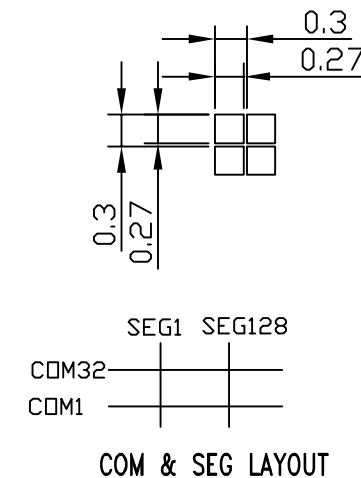
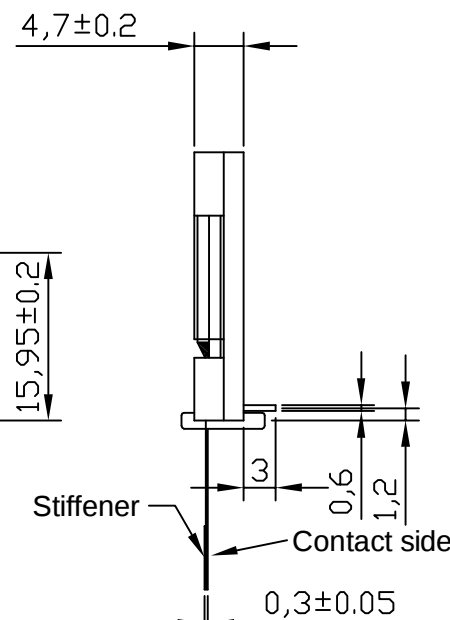


REV	DESCRIPTION:	DATE
1.0	First	2014-04-30

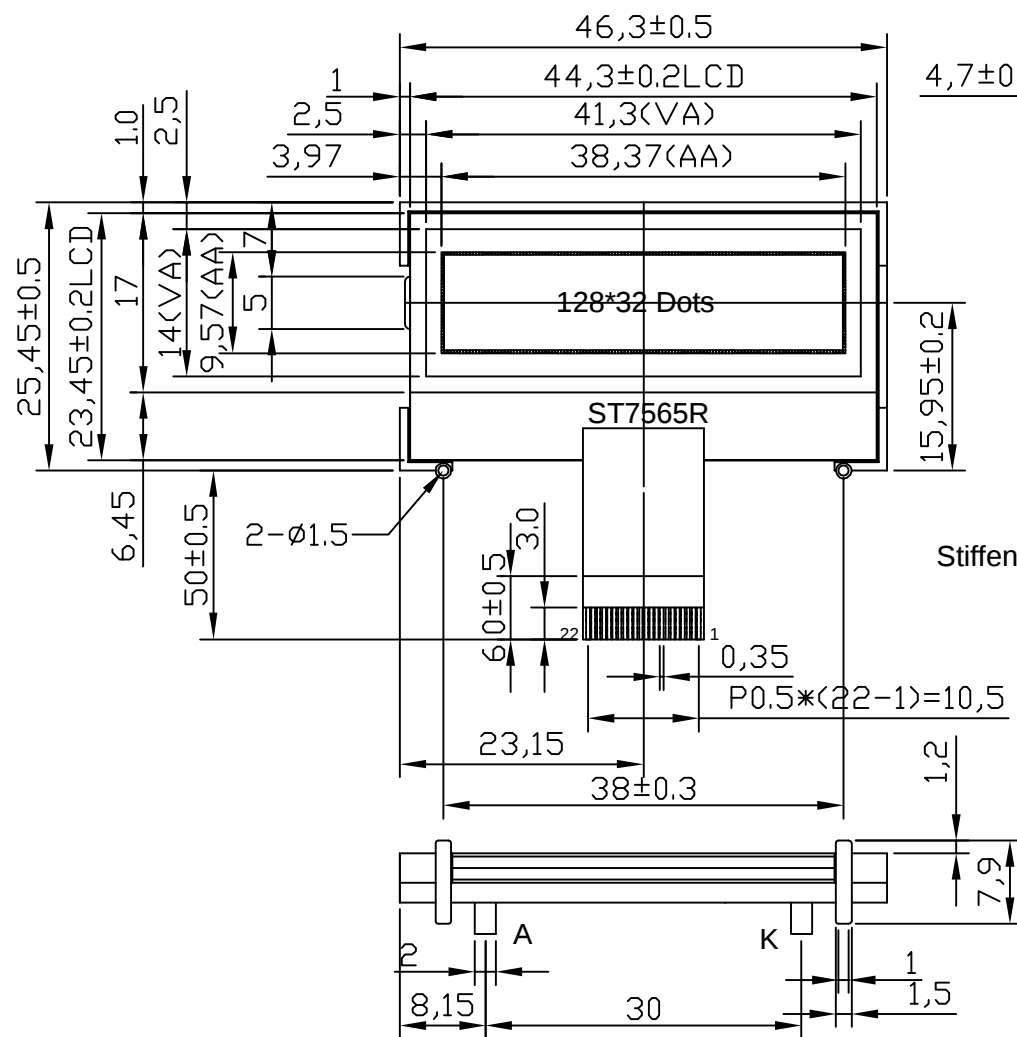

PIN ASSIGNMENT

1	GND
2	/CS1
3	/RES
4	A0
5	SCL
6	SI
7	VDD
8	VSS
9	VOUT
10	CAP3P
11	CAP1N
12	CAP1P
13	CAP2P
14	CAP2N
15	V4
16	V3
17	V2
18	V1
19	V0
20	VR
21	IRS
22	GND

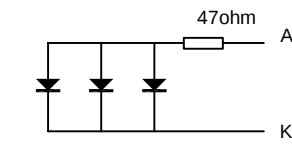

LED Backlight Circuit

Notes:

- 1). Driver Method: 1/33duty, 1/6bias, VDD3.3V VLCD6.0V
- 2). Display Type: FSTN/Positive/Transflective
- 3). Viewing Angle: 12:00
- 4). Operating Temp: -20°C~70°C
- 5). Storage Temp: -30°C~80°C
- 6). Driver: ST7565R 4-Line SPI
- 7). BKL Type: Edge White 3.3V/45mA
- 8). RoHS Compliant

Model Name: LGC12832B-FSW-FTW-33V33		LONGTECH OPTICS CO., LTD.	
GENERAL TOL: ± 0.2		LONGTECH	
APPROVALS	DATE	DRAWN NO.	SCALE:
DWN: LiuHaiYang			
CHK:		SIZE: A4	UNIT: mm
APP:			Page: