


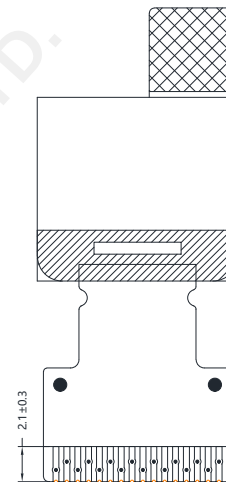
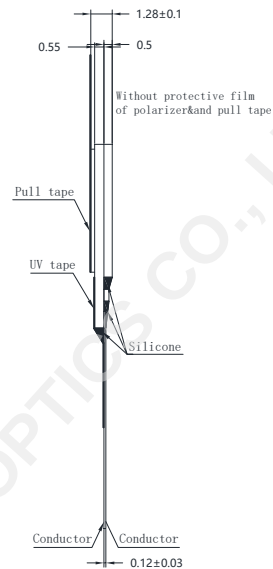


LGO7240A-042

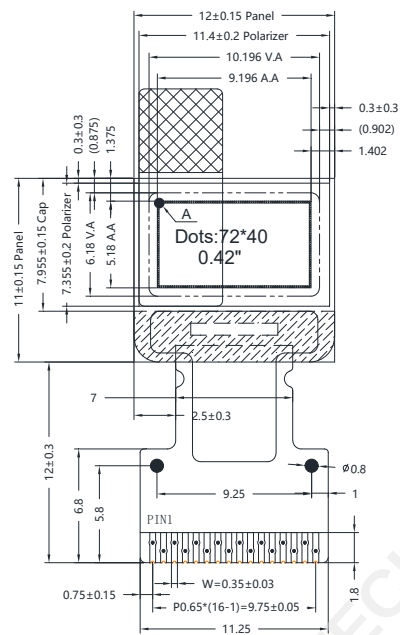

Com & Seg layout



Detail A (20:1)

Feature

1. 72 x 40 dots OLED display module; 0.42 inch.
2. Built-in SSD1315 driver IC; I2C / 4-wire SPI interface.
3. White monochrome display; all-direction viewing.
4. Active area: 9.196 x 5.18 mm; module size: 12.0 x 11.0 x 1.28 mm.
5. 16-pin FPC; 0.65 mm pin pitch; COG structure.
6. Operating temperature: -20 to +70 C; storage: -30 to +80 C; RoHS compliant.

Pin connections

Pin no	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Symbol	C2P	C2N	C1P	C1N	VBAT	VSS	VDD	BS1	CS#	RES#	D/C#	SCLK	SDIN	NC	VCOMH	VCC