




LGO7240B-042

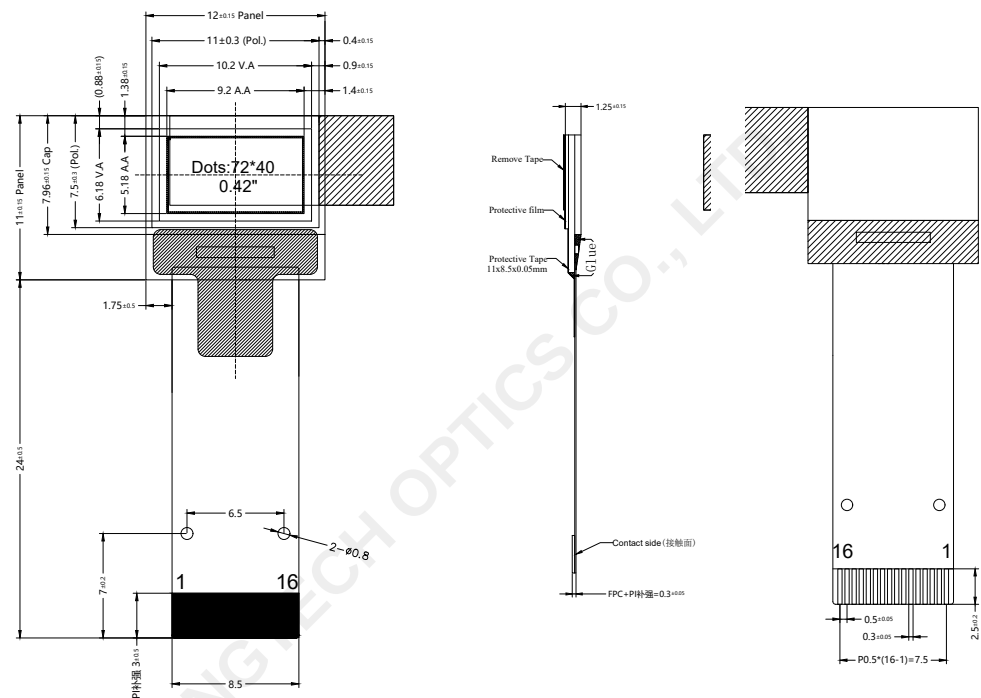

Com & Seg layout



Feature

1. 72 x 40 dots OLED display module; 0.42 inch.
2. Built-in SSD1315 driver IC; 4-wire SPI interface.
3. White monochrome display.
4. Active area: 9.2 x 5.18 mm; panel size: 12.0 x 11.0 mm.
5. 16-pin FPC; 0.50 mm pin pitch; panel thickness: 1.38 mm.
6. Operating temperature: -20 to +70 C; storage: -30 to +80 C; RoHS compliant.

Pin connections

Pin no	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Symbol	VSS	TP/NC	VSS	C2P	C2N	C1P	C1N	VBAT	VDD	CS	RES	DC	SCLK	SDIN	VCOMH	VCC