


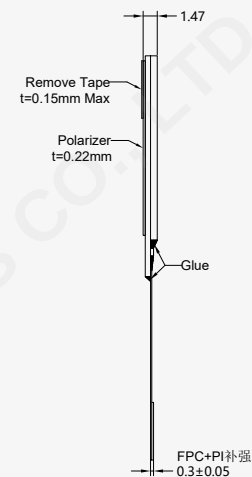


LGO12864F-130

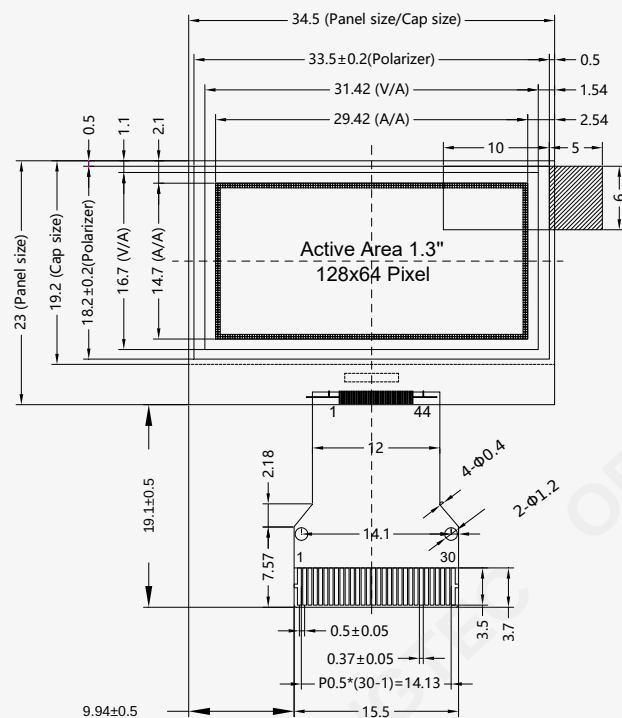

Feature

1. 128 x 64 dots OLED display module; 1.3 inch.
2. Built-in CH1116G driver IC; 8-bit 68XX/80XX, 3/4-wire SPI, I2C interfaces.
3. White display color.
4. Active area: 29.42 x 14.7 mm; module size: 34.5 x 23.0 x 1.47 mm.
5. Pixel pitch: 0.23 x 0.23 mm; pixel size: 0.21 x 0.21 mm.
6. 30-pin FPC; 0.50 mm pin pitch.
7. Operating temperature: -20 to +70 C; storage: -30 to +80 C.

Pin connections

Pin no	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Symbol	N.C.(GND)	C2P	C2N	C1P	C1N	VBAT	N.C.	VSS	VDD	BS0	BS1	BS2	CS#	RES#	D/C#	R/W#	E/RD#	D0	D1	D2	D3	D4	D5	D6	D7	IREF	VCOMH	VCC	VLSS	N.C.(GND)