

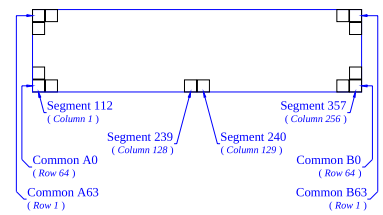


LGO25664A-312

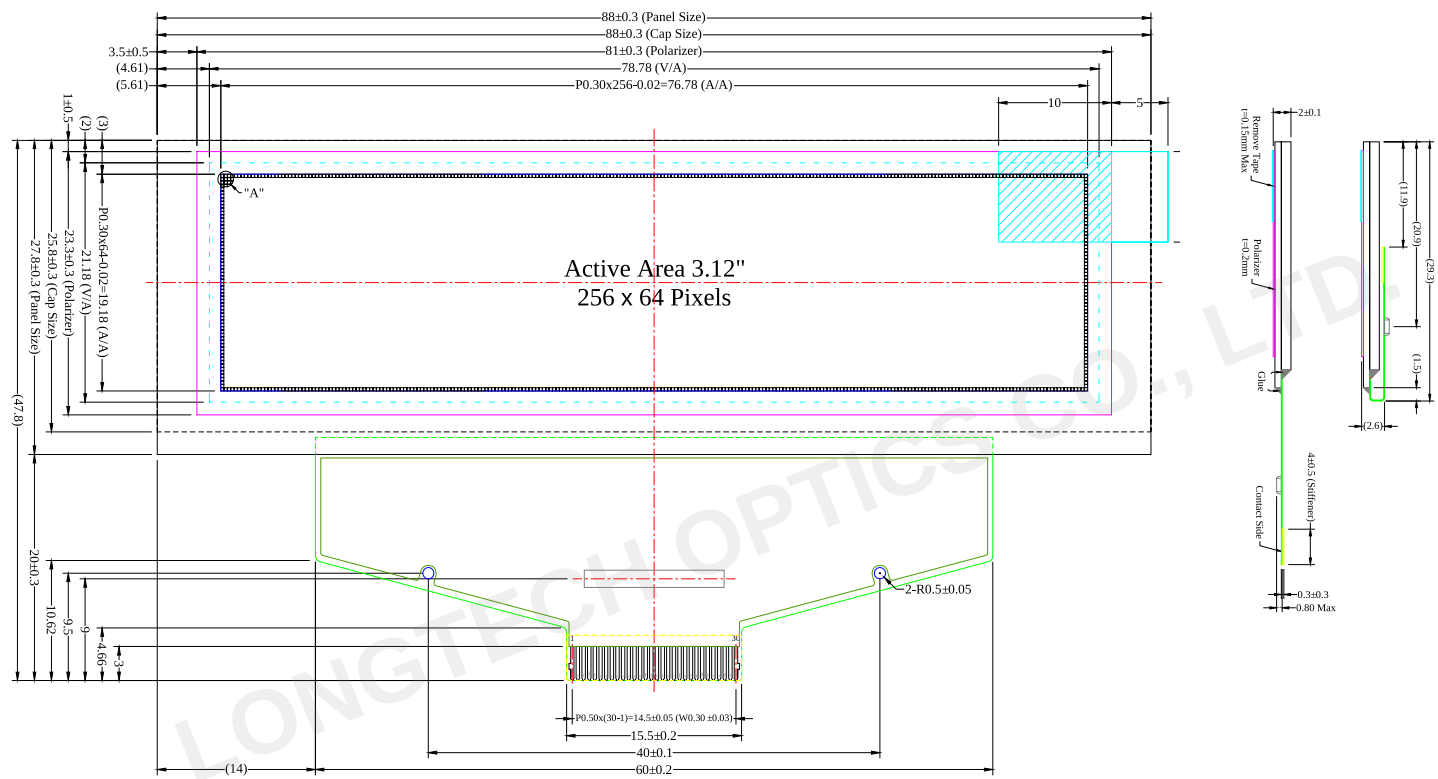

SEG & COM Layout



Feature

- 1. 3.12 inch 256 x 64 dots OLED module; COF structure.
- 2. Built-in SSD1322 driver IC; 8-bit 68XX/80XX Parallel and 3-/4-wire SPI interface.
- 3. White monochrome display; 1/64 duty; active area: 76.78 x 19.18 mm.
- 4. Panel size: 88.0 x 27.8 x 2.0 mm; pixel pitch: 0.30 x 0.30 mm.
- 5. Pixel size: 0.28 x 0.28 mm; 30-pin FPC, 0.5 mm pitch.
- 6. Operating temperature: -30 to +85 C; storage: -40 to +90 C; tolerance: +/-0.3 mm.

Pin connections

Pin no	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Symbol	N.C.(GND)	VSS	VCC	VCOMH	VLSS	D7	D6	D5	D4	D3	D2	D1	D0	E/RD#	R/W#	BS0	BS1	D/C#	CS#	RES#	FR	IREF	N.C.	VDDIO	VDD	VCI	VSL	VLSS	VCC	N.C.(GND)